


## External Dimensions (mm)

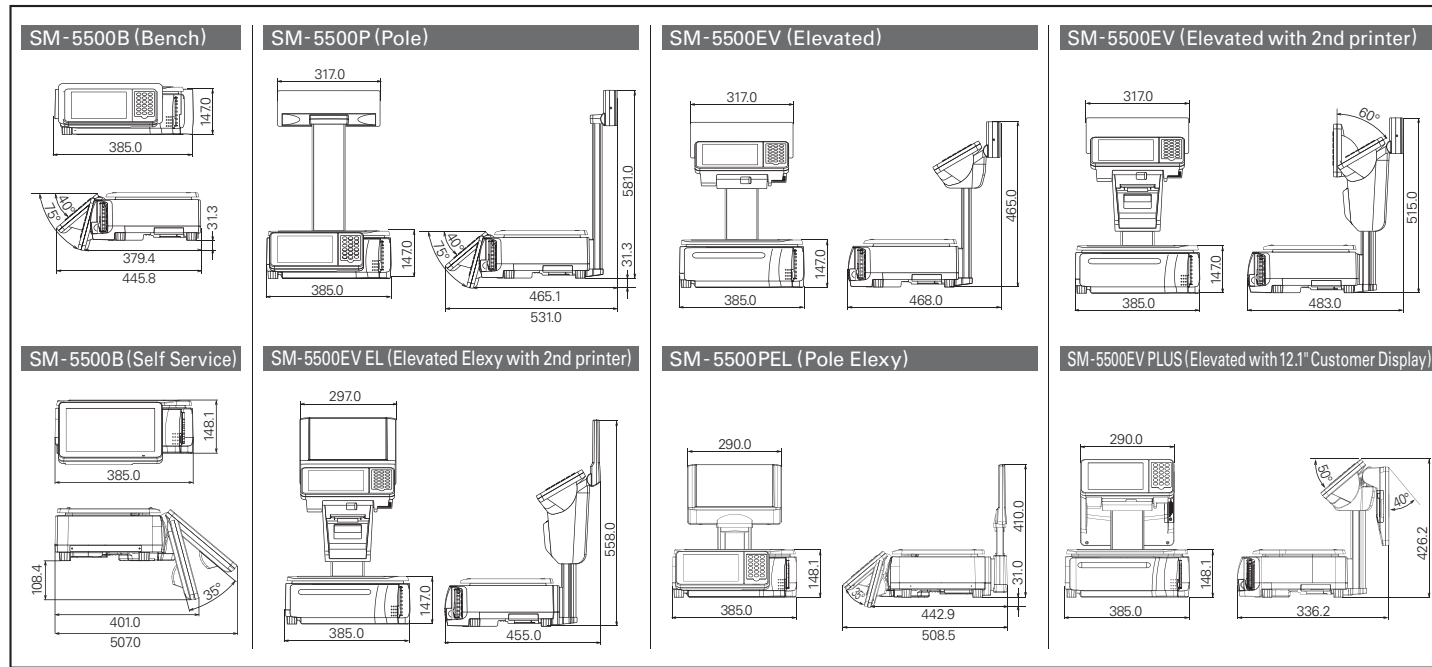

## Specifications

<b>Capacity</b>	<b>Max 6kg</b>	<b>Max 15kg / 30lb</b>	<b>Max 30kg</b>
Single Interval	e = 2g e = 1g	e = 5g / 0.01lb e = 2g	e = 10g e = 5g
Capacity	<b>Max 3 / 6kg</b>	<b>Max 6 / 15kg</b>	<b>Max 15 / 30kg</b>
Multi Interval	e = 1 / 2g	e = 2 / 5g	e = 5 / 10g

Model	SM-5500B (Bench)	SM-5500B (Self Service)	SM-5500P (Pole)	SM-5500EV (Elevated)	SM-5500EV (Elevated with 2nd printer)	SM-5500EV EL (Elevated Elexy with 2nd printer)	SM-5500PEL (Pole Elexy)	SM-5500EV PLUS (Elevated with 12.1\" Customer Display)
Dimension / W x D x H (mm)	385.0 x 445.8 (Max) x 147.0	385.0 x 507.0 (Max) x 148.1	385.0 x 531.0 (Max) x 581.0	385.0 x 468.0 x 465.0	385.0 x 483.0 x 515.0	385.0 x 455.0 x 558.0	385.0 x 508.5 (Max) x 410.0	385.0 x 336.2 x 426.2
Operator Display	○	○	○	○	○	○	○	○
Customer Display	○	○	○	○	○	○	○	○
Display Resolution	1 / 3,000, 1 / 6,000 & 1 / 7,500							
CPU	iMX31							
Memory	Factory default 512MB DDRAM, SDHC 2 / 4GB							
Label Size / W x H (mm)	80mm x 240mm (Max)							
Label / Receipt Roll Diameter	125mm (Max)							
Label / Receipt / 2nd Receipt Paper Width	80mm							
Printing Speed	Up to 150mm / Second*							
Power Source	AC 100 / 110 or 220 / 230 / 240 Volts (50 / 60 Hz) factory default							
Operating Temperature	+10°C to +40°C							
Humidity	15% to 85% RH							
Standard Interface	RS232C, Ethernet 10 / 100 Base T, USB 2.0 Host							
Net Weight	12.00kg	13.20kg	14.30kg	15.35kg	16.85kg	17.05kg	14.66kg	17.14kg

**Options** Wireless LAN (IEEE 802.11b/g), Scanner (In Built), Card Reader, 2nd Receipt Printer, Remote Display, Linerless Receipt Printer, Built-in speaker  
**Others / Variant** SM-5000 series, SM-5000H, SM-5000BS, SM-5500 Console

\*To achieve maximum print speed, high sensitivity thermal paper is necessary. Contact DIGI for details.



• Specifications are subject to change without prior notice  
 • Meet or exceed OIML Class III requirements



# SM-5500

## PC Based System Scale Printer

Breaking New Grounds With Salient Features



SM-5500EV

### TERAOKA WEIGH-SYSTEM PTE. LTD.

4 Leng Kee Road #05-02/03/04/05/11  
 SIS Building SINGAPORE 159088  
 TEL : +65 6472 2996  
 SALES: +65 6378 5387  
 FAX : +65 6863 4614  
 URL : www.teraoka.com.sg  
 E-MAIL : bdd@teraoka.com.sg

### TERAOKA SEIKO CO., LTD.

13-12 Kugahara 5-chome, Ohta-ku,  
 Tokyo 146-8580, JAPAN  
 TEL : +81-3-3752-2131  
 FAX : +81-3-3752-2801  
 URL : www.digisystem.com  
 E-MAIL : info@hq.digi.co.jp

SM5500 / B / 0311

Searching for  
 a New Balance

# Sophisticated Design & Features for a Touch of Elegance at Your Store

## Increase Sales at Point of Purchase

Additional information such as nutrition, origin, useful tips and recommended recipes can automatically be prompted to counter staff at the point of purchase to up sell or cross sell whenever the opportunity arises.



Recipe



Upsell

## Reduce Training Cost with e-Training

Product information, counter layout, cleaning procedure, hygiene and equipment manual can be displayed on demand for staff training.



e-Training

## Removable Key Pad for Easy Cleaning

Maintain high hygiene standard with the water resistant number key pad that is easily removed for cleaning.



Water Resistant Key Pad

## Adjustable Operator Display

The operator display is readily adjustable to suit different counter and operator height for the best viewing and operation position.



Adjustable Operator Display

## Built-In Scanner

Workspace is minimized as the SM-5500 comes with optional scanner that is ergonomically built in the scale.



Built-In Scanner

## Multi-Media Possibilities


Up sell or cross sell with the multi-media functionality by simply interfacing with a remote display.



Remote Display

## On Demand Printing

Product related information such as recipes or coupons can readily be printed on demand from the optional TVP-1500Q printer.

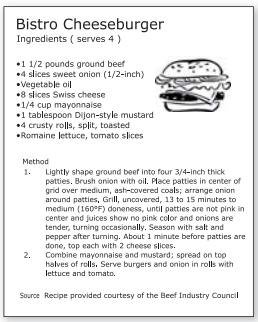


Recipe

## Higher Sales Turnover with Integrated Queue Management

SM-5500 integrated queue management provides customers with the convenience to continue shopping while waiting for their turn to be called, effectively reducing walk-aways and increasing sales.

- Queue number
- Average waiting time
- Number of customers ahead of the queue number



Q-System

## InfoCard Ensures Accurate Pricing and Product Information

Database updates at the server are automatically sent to the InfoCard, ensuring that pricing and production information is in sync with the checkouts at all times.


Dimension:  
226.4mm x 170.4mm x 18.0mm



Red / Blue



Red/Black



Black

## e.LABEL Ensures Fast and Easy PLU Retrieval

e.LABEL comes with built in hi-touch sensor. When tapped, PLU is automatically sent to SM-5000 PC scales.

Dimension:  
85.0mm x 73.5mm x 15.2mm



e.LABEL



Blue



Black

## Eye-Catching Large LCD Customer Display

Choice of red, blue or purple colour can be made to depict different messages. Scrolling advertising message and graphics further enhance sales effort when the scale is not in use.



Red



Purple



Blue

## More Features...

ECR functions, remote diagnostics, ordering system, linerless printing and help mode for operators.



Linerless Label

\* Check with your DIGI distributor for details